

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 887 893 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
06.11.2002 Bulletin 2002/45

(51) Int Cl.⁷: **H01R 13/74**, H01R 24/00,
H01R 13/46

(21) Application number: **98303921.5**

(22) Date of filing: **19.05.1998**

(54) **Multi-position jack frame**

Mehrstellungssteckdosenhalterung

Corps de jack à plusieurs positions

(84) Designated Contracting States:
DE GB

(30) Priority: **30.05.1997 US 866796**

(43) Date of publication of application:
30.12.1998 Bulletin 1998/53

(73) Proprietor: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(72) Inventor: **Arnett, Jaime Ray**
Fishers, IN 46038 (US)

(74) Representative: **Williams, David John et al**
Page White & Farrer,
54 Doughty Street
London WC1N 2LS (GB)

(56) References cited:
EP-A- 0 558 225 EP-A- 0 718 926
US-A- 3 813 640 US-A- 5 302 140
US-A- 5 362 254

EP 0 887 893 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to mounting arrangements for electrical connectors, and particularly to a communications jack frame that can be mounted on a face plate in one of a number of different orientations.

Discussion of the Known Art

[0002] U.S. Patent 5,096,439 (Mar. 17, 1992), base for the preamble of claim 1, discloses a communications jack and a wall plate having an opening for receiving the jack. The jack has flexible members on its side surfaces, for engaging corresponding slots in the sides of the wall plate opening. The jack is mounted on the wall plate with its front face parallel to the front of the wall plate, i.e., a flush mount. Thus, when a plug connector is inserted in the jack, a wire or cable extends away from the connector in a direction perpendicular to the wall plate. Sufficient space therefore must be available for the cable to bend and be routed in a direction other than perpendicular to the wall plate. See also U.S. Patent 5,041,018 (Aug. 20, 1991); and U.S. Patent 5,302,140 (Apr. 12, 1994).

[0003] Recently, a demand has arisen for wall or face plates that allow jacks to be mounted with a sloped orientation, so that the front of the jack will directly face, e.g., a floor surface beneath the face plate. Such a sloped or inclined orientation would allow a cable to be routed directly downward toward the floor when its plug is inserted in the jack. See co-pending U.S. Patent Application No. 08/534,218 filed September 26, 1995, and assigned to the assignee of the present invention.

[0004] Manufacturers of communication jacks have invested largely in wall plate and mounting box hardware that provides a parallel or flush mounting orientation for the jacks. To build new molds for wall plates that would allow existing jacks to be mounted to face downward (i.e., toward the floor), for customers desiring a sloped jack orientation, would be very expensive. As far as is known, there are no wall plates and jacks that can be combined to allow the jacks to mount either flush or facing downward, at the user's option. As mentioned, different products are needed depending on which mounting orientation is desired. This means additional costs and inventory for the jack and wall plate manufacturers, and for their customers.

[0005] Another problem arises with respect to icons, i.e., small legend-bearing tabs that snap onto the front face of the jack. The icons serve to identify the jack function, e.g., whether the jack is associated with a telephone, or a data or modem communications line. If a jack is to be mounted on a face plate in either one of a flush or a sloped orientation, then the icon must be clear-

ly visible to the user in either jack mount position.

SUMMARY OF THE INVENTION

[0006] According to the invention, a jack frame includes a jack frame block having a front surface, a pair of side surfaces, and a top surface. The front surface has a plug opening having a plug axis along which a plug can be inserted to connect with the frame block. The front surface is dimensioned to be received in a jack opening in a face plate, wherein a portion of the inner periphery of the opening is defined by a pair of side walls and a top wall. The top surface of the jack frame block has a first surface portion extending at a first angle with respect to the axis of the plug opening and a second surface portion extending at a second angle with respect to the plug axis, wherein either the first or the second surface portion can be aligned with respect to the top wall of the jack opening so that the frame block can be mounted on the face plate with a selected orientation depending on which of the first and the second surface portions is aligned with the top wall of the jack opening. First engagement members on the frame block are arranged to engage walls of the jack opening when the frame block is mounted in the selected orientation, to limit movement of the frame block relative to the face plate.

[0007] For a better understanding of the invention, reference is made to the following description taken in conjunction with the accompanying drawing, and the scope of the invention will be pointed out by the appended claims.

BRIEF DESCRIPTION OF THE DRAWING

[0008] In the drawing:

FIG. 1 is a perspective view of a jack frame according to the invention, including an icon tab that can be mounted on the frame at either one of two locations corresponding to a selected mounting orientation of the frame;

FIG. 2 is a perspective view of the jack frame looking from the rear in FIG. 1;

FIG. 3 is a side view of the jack frame as seen from the right side in FIG. 2;

FIG. 4 is a bottom view of the jack frame in FIG. 3, showing the frame mounted in a flush orientation in a face plate;

FIG. 5 is an assembly view of the jack frame, the face plate, and a communications plug arranged to connect to the jack frame when the frame is mounted on the face plate;

FIG. 6 is a side elevation view of the jack frame mounted in a flush orientation;

FIG. 7 is a side elevation view of the jack frame mounted in a sloped or downwardly inclined orientation;

FIG. 8 is a side view of a second embodiment of a jack frame according to the invention; and
FIG. 9 is a side view of a third embodiment of a jack frame according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0009] FIG. 1 is a perspective view of a jack frame 10 according to the invention. The jack frame 10 includes a jack frame block 12 formed of an electrically insulative material, preferably a plastics that can be molded and which meets all applicable standards with respect to electrical properties and flammability. Such plastics materials include but are not limited to polycarbonate, ABS, and blends thereof.

[0010] The jack frame block 12 has a front surface 14, a pair of side surfaces 16, 18 (FIGS. 3 and 5), and a top surface 20. The front surface has a plug opening 21 with a plug axis P along which a communications plug can be inserted to engage and connect with terminals 23 in the frame block 12. The front surface 14 is dimensioned so that the frame block 12 can be received in a jack opening 22 in a face plate 24 as seen in FIG. 5. The face plate 24 and the configuration of its jack opening 22 are preferably similar to face plates having jack openings as disclosed in FIGS. 2-4 of the mentioned U.S. Patent 5,096,439. Specifically, a portion of the inner periphery of the jack opening 22 is framed by a pair of side walls 26, 27, and a top wall 28 as shown in FIG. 5.

[0011] The top surface 20 of the jack frame block 12 has a first surface portion 30 (FIG. 1) that extends at a first angle with respect to the plug axis P of the frame block 12. In the illustrated embodiment, the first surface portion 30 extends substantially parallel (i.e., at 0 degrees) relative to the plug axis P. The frame block top surface 20 also has a second surface portion 32 which may be contiguous to the first surface portion 30, and which extends at a second angle with respect to axis P of the plug opening 21 in frame block 12. In the present embodiment, second surface portion 32 extends at an angle A of about 38 degrees relative to plug axis P. See FIG. 3.

[0012] When mounting the jack frame 10 on the face plate 24, either the first surface portion 30 or the second surface portion 32 of the frame block's top surface 20, can be aligned with the top wall 28 of the jack opening 22 in plate 24. Specifically, as shown in FIG. 6, frame block 12 is mounted on face plate 24 with the front surface 14 of the block substantially flush or parallel with the front of the face plate 24. The first surface portion 30 on the top surface of the block 12, is aligned flush with the top wall 28 that frames the jack opening in the face plate 24. In FIG. 7, the second surface portion 32 of the frame block top surface 20, is aligned flush with the top wall 28 of the jack opening in the face plate 24. It will be appreciated that the same jack frame block 12 is capable of providing two different mounting orientations one of which (FIG. 6) supports a mating commu-

nications plug 33 along a line perpendicular to the face plate 24, while the other (FIG. 7) accepts the mating plug 33 at an angle of, for example, about 38 degrees relative to the horizontal. Further construction details of the jack frame 10 now follow.

[0013] The present jack frame block 12 may in some respects be of similar construction as the communication jack or receptacle disclosed in the mentioned U.S. Patent 5,041,018. Important differences in the construction of the present jack frame block 12 with respect to the jack of the '018 patent, are noted below. Also, the present face plate 24 may be of identical or similar construction as a wall plate disclosed in FIGS. 2 and 3 of the mentioned U.S. Patent 5,096,439.

[0014] One important distinction between the present jack frame block 12 and the prior communication jack or module, is the formation of the second surface portion 32 following the first surface portion 30 on the present frame block 12, wherein the second surface portion 32 is inclined with respect to the plug axis A at such an angle as to cause the block 12 to face downward (see FIG. 7) when the second surface portion 32 is aligned with the top wall 28 of the face plate jack opening 22.

[0015] Whether the frame block 12 is mounted flush as in FIG. 6 or inclined as in FIG. 7, movement of the frame block 12 in a rearward direction relative to the face plate 24 is limited by the action of first engagement members in the form of flexible, wedge-shaped tabs 40, 42 protruding preferably from the side surfaces 16, 18 of the frame block. See FIG. 4. When the block 12 is inserted in the jack opening 22 from the rear of the face plate 24, inner portions of the tabs 40, 42 deflect into the plug opening 21 inside the block 12 as the tabs 40, 42 slide against the edges of the side walls 26, 27 framing the face plate jack opening 22. With continued movement toward the front of the face plate, the tabs 40, 42 snap outwardly to engage slots 46, 48 in the face plate side walls 27, 26, respectively. See FIG. 4.

[0016] To ensure that frame block 12 will not be dislodged when a force is applied from the front of the frame block such as when inserting a plug in the direction of arrow B in FIG. 4, each of the tabs 40, 42 is formed to ratchet on corresponding vertical ledges 50, 52 at the rear ends of the slots 46, 48. Accordingly, when a force is applied to the block 12 in the direction of arrow B, the protruding tabs 40, 42 tend to deflect away from the side walls of the frame block and thus prevent the block from being inadvertently dislodged out the rear of the face plate 24.

[0017] After the protruding tabs 40, 42 snap into the corresponding side wall slots 46, 48, further movement of the frame block 12 toward the front of the face plate 24 is limited by the action of second engagement members which, in the embodiments of FIGS. 1-7 and FIG. 8, are located on the block side surfaces 16, 18. In the FIGS. 1-7 embodiment, a first set of the second engagement members in the form of vertical stop members 54, 56 are located to abut the rear edges of the face plate

side walls 27, 26, respectively, just after the flexible protruding tabs 40, 42 snap in place in the side wall slots 46, 48 and the frame block 12 is mounted flush as in FIGS. 4 and 6. The stop members 54, 56 are located at the side of the plug axis P further from the top surface 20 of the frame block 12. Unlike the prior communication jacks, no vertical stop members are located at the side of the plug axis P closer to the top surface 20 of the frame block 12.

[0018] A second set of second engagement members in the form of inclined stop members 58, 60 are located on the side surfaces of the frame block 12 to abut corresponding edges of the face plate side walls 26, 27 just after the tabs 40, 42 snap into the side wall slots 46, 48 and the frame block 12 is mounted in the sloped orientation in FIG. 7. The stop members 58, 60 are located at the side of the plug axis P closer to the top surface 20 of the frame block 12, and serve to limit movement of the frame block toward the front of the face plate 24. Also, in the sloped orientation in FIG. 7, further movement of the frame block 12 in the direction of arrow D is stopped by the jack opening bottom wall 62, wherein the bottom wall 62 confronts a front bottom edge of the frame block 12 as shown in FIG. 7.

[0019] Before mounting the frame block 12 in either orientation of FIG. 6 or FIG. 7, an electrical connector 70 which may be of the insulation displacement kind and similar to connectors shown in the mentioned U.S. Patents 5,096,439 and 5,096,442, is operatively inserted in a connector opening 72 at the rear of the jack frame block 12 (see FIG. 2). Cables running, for example, in a wall behind the face plate 24 are connected with contact terminals in the plug opening 21 of the frame block 12, by connecting with corresponding terminals of the electrical connector 70.

[0020] The present jack frame 10 is further distinguishable over the known communication modules or jacks in that it allows an icon tab 80 (FIG. 1) identifying the function of the jack frame, to be visibly mounted on the frame block 12 whether the frame block is mounted flush as in FIG. 6, or inclined as in FIG. 7. Specifically, when the frame block 12 is mounted in the flush orientation, the icon tab 80 is seated in an elongate recess 82 in the front surface 14 of the block. The recess 82 is aligned next to the mouth of the plug opening 21 in the frame block 12. The icon tab 80 has a pair of end legs 84, 86 that snap into corresponding slots 88, 90 at opposite ends of the recess 82.

[0021] If the jack frame block 12 is mounted in the inclined orientation of FIG. 7, the icon tab 80 is placed so that its end legs 84, 86 snap into corresponding slots 92, 94 in the top surface 20 of the frame block, and the icon tab 80 is seated on the first surface portion 30 on the block as shown in dotted lines in Figure 1. The icon tab 80 thus can be mounted to be visible when a user is looking down on the first surface portion 30 of the frame block that protrudes from the face plate 24 in the sloped orientation in FIG. 7.

[0022] It will be appreciated that the present jack frame 10 is configured to allow it to be snapped into a standard outlet face plate in either a flush or a sloped orientation. The jack frame can be used with an identifying icon that can be attached at either of two locations corresponding to the flush or the sloped mounting orientation. The present jack frame 10 allows for either mounting orientation without requiring different jack frame blocks or otherwise having to manufacture two different jacks or face plates. Further, when in the flush mount orientation, it will be seen that the jack frame block 12 can be set so that the icon tab 80 is positioned either above or below the plug opening 21.

[0023] FIG. 8 is a side view of a second embodiment of a jack frame 110, according to the invention. Parts corresponding to those in the embodiment of FIGS. 1-7 have corresponding reference numerals increased by 100.

[0024] The jack frame 110 differs from the jack frame 10 in FIGS. 1-7 with respect to the form and location of the second engagement members on the frame block 112. Specifically, an elongated, inclined stop member or bar protrudes from each block side surface. In FIG. 8, stop member 196 is shown protruding from the block side surface 116. The stop member forms a vertical stop surface 197 at an end of the member near first engagement member 140. The stop surface 197 comes into flush contact with a corresponding wall of a face plate opening, when the frame block 112 is mounted flush with respect to a face plate. Stop member 196 also forms an inclined stop surface 198 that comes into flush contact with a wall of the face plate opening, when the frame block 112 is mounted inclined with respect to the face plate. Accordingly, with the embodiment in FIG. 8, the stop member 196 and a similar stop member (not shown) on the opposite side surface of the frame block 112 act to hold the block at either a flush or an inclined mounting position on a given face plate.

[0025] FIG. 9 is a side view of a third embodiment of a jack frame 210, according to the invention. Parts corresponding to those in the embodiment of FIGS. 1-7 have corresponding reference numerals increased by 200.

[0026] The jack frame 210 in FIG. 9 differs from the jack frame 10 of FIGS. 1-7 with respect to the form and location of the second engagement members on the frame block 212. Specifically, a second engagement member in the form of an elongated stop member or bar 296 protrudes from a bottom surface 295 of the frame block 212, and extends parallel to the front surface 214 of the block. The stop member 296 forms a vertical stop surface 297 along a front-facing side of the member. The stop surface 297 comes into flush contact with a wall of a face plate opening when the frame block 212 is mounted flush with respect to a face plate. Another second engagement member in the form of an elongated stop member or bar 298 protrudes from the second surface portion 230 of the frame block 212, and extends parallel

to a rear edge of the second surface portion. The stop member 298 forms an inclined stop surface 299 that comes into flush contact with a wall of a face plate opening when the frame block 212 is mounted inclined with respect to the face plate.

[0027] While the foregoing description represents a preferred embodiment of the invention, it will be obvious to those skilled in the art that various changes and modifications may be made without departing from the scope of the invention, which is pointed out by the following claims.

Claims

1. A jack frame, comprising:
 - a jack frame block (12) having a front surface (14), a pair of side surfaces (16, 18), and a top surface (20);
 - said front surface (14) having a plug opening (21) with a plug axis along which a plug connector is to be inserted to connect to said jack frame block, wherein said front surface is dimensioned to be received in a jack opening (22) in a face plate (24), and a portion of the inner periphery of the jack opening is defined by a pair of side walls (26, 27) and a top wall (28);
 - characterised by the top surface (20) of the jack frame block (12) having a first surface portion (30) extending at a first angle with respect to the plug axis of said plug opening, and a second surface portion (32) extending at a second angle with respect to the plug axis, wherein either the first surface portion (30) or the second surface portion (32) of said top surface can be aligned with the top wall of the jack opening (22) so that the frame block can be mounted with a selected orientation relative to the face plate (24) according to which one of the first and the second surface portions (30, 32) is aligned with the top wall (28) of the jack opening (22); and
 - first engagement members (24) on the frame block, said first engagement members being constructed and arranged to engage walls (26, 27) of the jack opening (22) when the frame block (12) is mounted in the selected orientation to limit movement of the frame block relative to the face plate (24).
2. A combination comprising a jack frame (12) according to claim 1 and
 - a face plate (24) having a jack opening (22), and a pair of side walls (26, 27) and a top wall (28) all of which walls define part of the inner periphery of the jack opening (22).
3. A jack frame according to claim 1, or a combination according to claim 2, wherein said first engagement members comprise flexible tabs (24) protruding from the side surfaces (16, 18) of the frame block.
4. A jack frame according to claim 1, or a combination according to claim 2, including second engagement members (54, 56, 58, 60) on said frame block, said second engagement members being constructed and arranged to engage walls of the jack opening when the frame block is mounted in the selected orientation from a rear side of said face plate to limit movement of the frame block toward a front side of said face plate.
5. A jack frame or a combination according to claim 4, wherein a first set of said second engagement members are in the form of first stop members (54, 56) located to abut rear edges of wall (26, 27) of said jack opening (22) when the jack frame is mounted in a first orientation relative to said face plate.
6. A jack frame or a combination according to claim 5, wherein a second set of said second engagement members are in the form of second stop members (58, 60) located to abut the rear edges of said walls when the jack frame is mounted in a second orientation different from the first orientation relative to the face plate.
7. A jack frame or a combination according to claim 6, wherein one of said first and said second sets of second engagement members (54, 56, 58, 60) is located at one side of the plug axis which one side is further from the top surface of the frame block, and the other of said first and said second sets of second engagement members is located at an opposite side of the plug axis which opposite side is closer to the top surface of the frame block.
8. A jack frame (110) or a combination according to claim 4, wherein said second engagement members are in the form of raised bars (196) on the side surfaces (116) of the frame block.
9. A jack frame (210) or a combination according to claim 4, wherein at least one of said second engagement members is in the form of a raised bar (296) on either one of the top surface and a bottom surface (295) of said frame block.
10. A jack frame or a combination according to claim 1, including an icon tab (80) having a legend corresponding to a intended function of the jack frame, and said frame block is constructed and arranged to seat the icon tab at a selected one of two different positions on the frame block so that the icon tab is

visible to a user when the frame block is mounted in either one of two different orientations relative to said face plate.

wobei die ersten Anlageteile flexible Lappen (40, 42) umfassen, die von den Seitenflächen (16, 18) des Steckdosengehäuses vorstehen.

Patentansprüche

1. Steckdose umfassend:

ein Steckdosengehäuse (12) mit einer Vorderseite (14), zwei Seitenflächen (16, 18) und einer Oberseite (20);

die Vorderseite (14) weist eine Steckeröffnung (21) mit einer Steckerachse auf, entlang welcher ein Steckverbinder einzuführen ist, um mit dem Steckdosengehäuse verbunden zu sein, wobei die Vorderseite zur Aufnahme in einer Dosenöffnung (22) einer Frontplatte (24) dimensioniert ist und ein Teil des inneren Umfangs der Dosenöffnung durch zwei Seitenwände (26, 27) und eine Oberseitenwand (28) bestimmt wird;

gekennzeichnet durch folgende Merkmale:

die Oberseite (20) des Dosengehäuses (12) weist einen ersten Oberflächenteil (30), der sich in einem ersten Winkel mit Bezug auf die Steckerachse der Steckeröffnung erstreckt, und einen zweiten Oberflächenteil (32) auf, der sich in einem zweiten Winkel mit Bezug auf die Steckerachse erstreckt, wobei entweder der erste Oberflächenteil (30) oder der zweite Oberflächenteil (32) der Oberseite mit der Oberseitenwand der Steckdosenöffnung (22) ausgerichtet werden kann, so dass das Gehäuse mit vorgewählter Ausrichtung relativ zu der Frontplatte (24) montiert werden kann, gemäß welcher der erste oder der zweite Oberflächenteil (30, 32) zu der Oberseitenwand (28) der Steckdosenöffnung (22) ausgerichtet ist; und erste Anlageteile (40, 42) am Dosengehäuse, die so ausgebildet und angeordnet sind, dass sie an den Wandungen (26, 27) der Steckdosenöffnung (22) anliegen, wenn das Gehäuse (12) in ausgewählter Richtung montiert wird, um die Verschiebung des Gehäuses relativ zu der Frontplatte (24) zu begrenzen.

2. Kombination aus Steckdosengehäuse (12) nach Anspruch 1 und einer Frontplatte (24) mit einer Steckdosenöffnung (22) und zwei Seitenwänden (26, 27) sowie einer Oberseitenwand (28), wobei diese Wände einen Teil des inneren Umfangs der Steckdosenöffnung (22) bestimmen.

3. Steckdosengehäuse nach Anspruch 1 oder eine Kombination gemäß Anspruch 2,

4. Steckdosengehäuse nach Anspruch 1 oder eine Kombination gemäß Anspruch 2, umfassend zweite Anlageteile (54, 56, 58, 60) am Steckdosengehäuse, wobei die zweiten Anlageteile so ausgebildet und angeordnet sind, dass sie an den Wandungen der Steckdosenöffnung anliegen, wenn das Steckdosengehäuse in vorgewählter Richtung von einer Rückseite der Frontplatte montiert wird, um die Verschiebung des Steckdosengehäuses zu einer Vorderseite der Frontplatte zu begrenzen.

5. Steckdosengehäuse oder eine Kombination gemäß Anspruch 4, worin ein erster Satz der zweiten Anlageteile in der Form von ersten Anschlagsteilen (54, 56) vorliegen, die zur Anlage an rückwärtigen Rändern der Wandungen (26, 27) der Steckdosenöffnung (22) angeordnet sind, wenn das Steckdosengehäuse in einer ersten Orientierung relativ zu der Frontplatte montiert wird.

6. Steckdosengehäuse oder eine Kombination gemäß Anspruch 5, worin ein zweiter Satz von zweiten Anlageteilen in Form von zweiten Anschlagsteilen (58, 60) vorgesehen sind, die zur Anlage an rückwärtigen Rändern der Wandungen angeordnet sind, wenn das Steckdosengehäuse in einer zweiten Orientierung unterschiedlich von der ersten Orientierung relativ zu der Frontplatte montiert wird.

7. Steckdosengehäuse oder eine Kombination gemäß Anspruch 6, worin der erste oder der zweite Satz der zweiten Anlageteile (54, 56, 58, 60) auf einer solchen Seite der Steckerachse gelegen ist, die weiter von der Oberseite des Steckdosengehäuses entfernt ist, und dass der jeweils andere Satz der zweiten Anlageteile an der entgegengesetzten Seite der Steckerachse gelegen ist, die der Oberseite des Steckdosengehäuses näher ist.

8. Steckdosengehäuse (110) oder eine Kombination gemäß Anspruch 4, worin die zweiten Anlageteile in Form von erhabenen Leisten (196) auf den Seitenoberflächen (116) des Steckdosengehäuses vorliegen.

9. Steckdose (210) oder eine Kombination gemäß Anspruch 4, worin mindestens ein zweites Anlageteil in Form einer erhabenen Leiste (296) entweder auf der Oberseite oder einer Unterseite (295) des Steckdosengehäuses vorliegt.

10. Steckdose oder eine Kombination

gemäß Anspruch 1, umfassend ein ICON-Anhängsel (80) mit einer Legende entsprechend einer beabsichtigten Funktion der Steckdose, wobei die Steckdose so ausgebildet und angeordnet ist, dass das ICON-Anhängsel an einer ausgewählten Stelle von zwei unterschiedlichen Stellen am Steckdosengehäuse gesteckt werden kann, so dass das ICON-Anhängsel für einen Benutzer sichtbar ist, wenn das Steckdosengehäuse in einer von zwei unterschiedlichen Ausrichtungen relativ zu der Frontplatte montiert ist.

Revendications

1. Corps de jack, comprenant :

un bloc (12) de corps de jack ayant une surface (14) avant, une paire de surfaces (16, 18) latérales et une surface (20) supérieure ; la surface (14) avant ayant une ouverture (21) d'enfichage ayant un axe d'enfichage le long duquel un connecteur à fiche peut être inséré pour connecter le bloc de corps de jack, la surface avant étant dimensionnée de manière à être reçue dans une ouverture (22) de jack ménagée dans une plaque (24) de face et une partie de la périphérie intérieure de l'ouverture du jack est définie par une paire de parois (26, 27) latérales et une paroi (28) supérieure ;

caractérisé en ce que la surface (20) supérieure du bloc (12) de corps de jack a une première partie (30) de surface s'étendant en faisant un premier angle avec l'axe d'enfichage de l'ouverture d'enfichage et une deuxième partie (32) de surface s'étendant en faisant un second angle par rapport à l'axe d'enfichage, soit la première partie (30) de surface, soit la deuxième partie (32) de surface de la surface supérieure pouvant être alignée avec la paroi supérieure de l'ouverture (22) de jack de sorte, que le bloc de jack peut être monté en ayant une orientation sélectionnée par rapport à la plaque (24) de face suivant que la première ou la deuxième partie (30, 32) de surface est alignée avec la paroi (28) supérieure de l'ouverture (22) du jack ; et par des premiers éléments (24) de coopération sur le bloc de corps, les premiers éléments de coopération étant constitués et disposés de manière à coopérer avec des parois (26, 27) de l'ouverture (22) du jack, lorsque le bloc (12) du corps est monté dans l'orientation sélectionnée afin de limiter le mouvement du bloc de corps par rapport à la plaque (24) de face.

2. Combinaison comprenant un corps (12) de jack suivant la revendication 1, et une plaque (24) de face

ayant une ouverture (22) de jack et une paire de parois (26, 27) latérales et une paroi (28) supérieure, toutes ces parois définissant une partie de la périphérie intérieure de l'ouverture (22) du jack.

3. Corps de jack suivant la revendication 1 ou combinaison suivant la revendication 2, dans lequel les premiers éléments de coopération comprennent des pattes (24) so as faisant saillie des surfaces (16, 18) latérales du bloc de corps.

4. Corps de jack suivant la revendication 1 ou combinaison suivant la revendication 2, comprenant des deuxièmes éléments (54, 56, 58, 60) de coopération sur le bloc de corps, les seconds éléments de coopération étant constitués et disposés de manière à coopérer avec des parois de l'ouverture du jack, lorsque le bloc de corps est monté dans l'orientation sélectionnée à partir d'un côté arrière de la plaque de face afin de limiter le mouvement du bloc de corps vers un côté avant de la plaque de face.

5. Corps de jack ou combinaison suivant la revendication 4, dans lequel un premier jeu des deuxièmes éléments de coopération est sous la forme de premiers éléments (54, 56) de butée disposés de manière à venir en butée sur des bords arrières de parois (26, 27) de l'ouverture (22) du jack, lorsque le corps de jack est monté dans une première orientation par rapport à la plaque de face.

6. Corps de jack ou combinaison suivant la revendication 5, dans lequel un deuxième jeu des deuxièmes éléments de coopération est sous la forme de deuxièmes éléments (58, 60) de butée disposés de manière à venir en butée sur les bords arrières des parois, lorsque le corps de jack est monté dans une deuxième orientation différente de la première orientation par rapport à la plaque de face.

7. Corps de jack ou combinaison suivant la revendication 6, dans lequel l'un des premier et deuxième jeux des deuxièmes éléments (54, 56, 58, 60) de coopération est disposé d'un côté de l'axe d'enfichage, ce côté étant éloigné de la surface supérieure du bloc de corps et l'autre des premier et deuxième jeux de deuxièmes éléments de coopération est disposé sur un côté opposé de l'axe d'enfichage, ce côté opposé étant plus proche de la surface supérieure du bloc de corps.

8. Bloc (110) de jack ou combinaison suivant la revendication 4, dans lequel les deuxièmes éléments de coopération sont sous la forme de barres (196) en saillie des surfaces (116) latérales du bloc de corps.

9. Corps (210) de jack ou combinaison suivant la revendication 4, dans lequel au moins l'un des deuxièmes

mes éléments de coopération est sous la forme d'une barre (296) en saillie sur l'une ou l'autre de la surface supérieure et d'une surface (295) de fond du bloc de corps.

5

10. Corps de jack ou combinaison suivant la revendication 1, comprenant une patte (80) d'icône ayant une légende correspondant à une fonction visée du corps de jack et le bloc de corps est constitué et disposé de manière à mettre la patte d'icône en l'une sélectionnée de deux positions différentes sur le bloc de corps, de sorte que la patte d'icône soit visible pour un utilisateur lorsque le bloc de corps est monté dans l'une ou l'autre de deux orientations différentes par rapport à la plaque de face.

10

15

20

25

30

35

40

45

50

55

FIG. 1

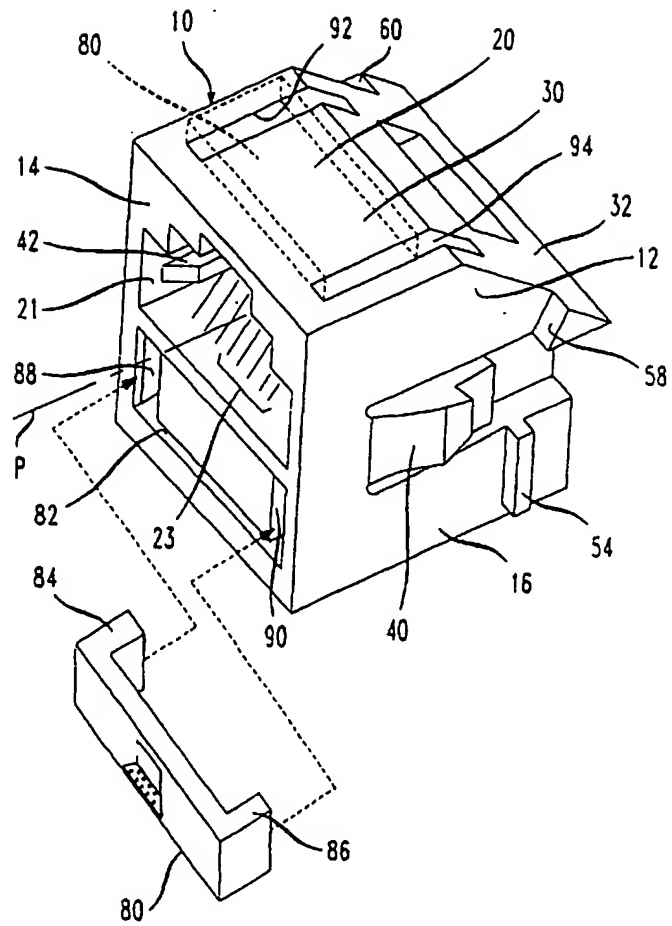


FIG. 2

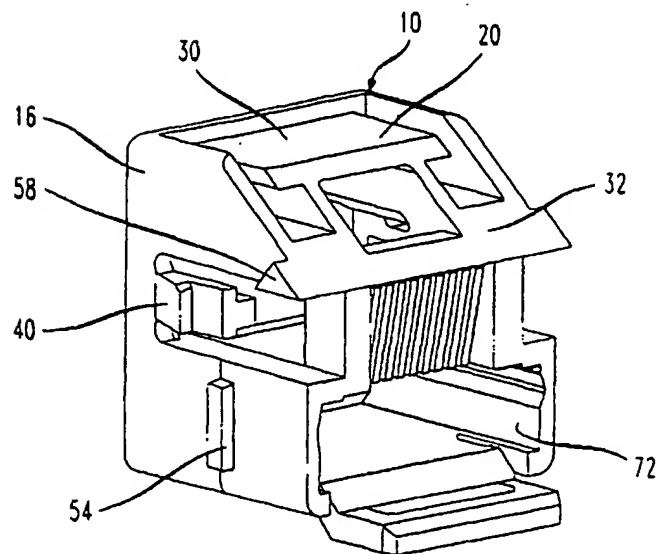


FIG. 3

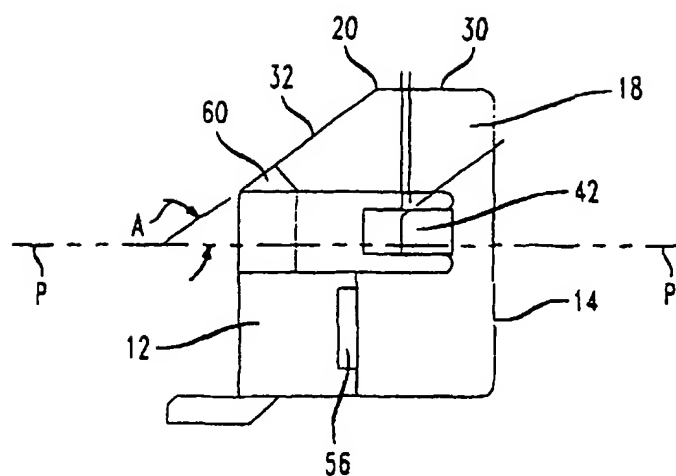
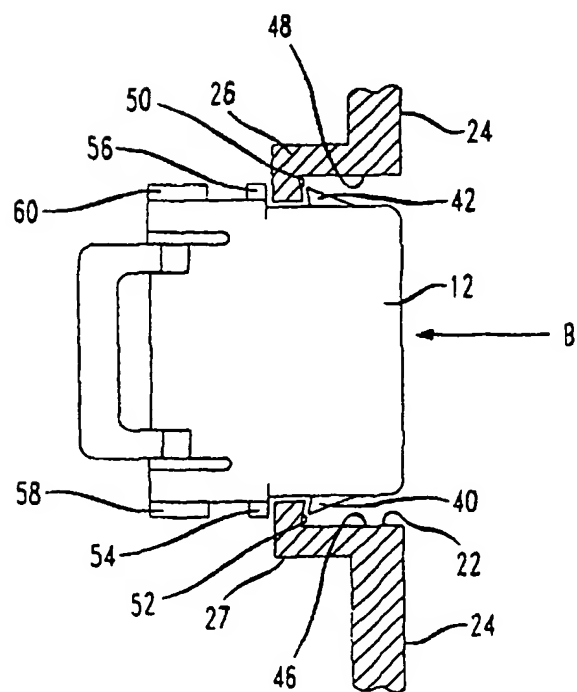


FIG. 4



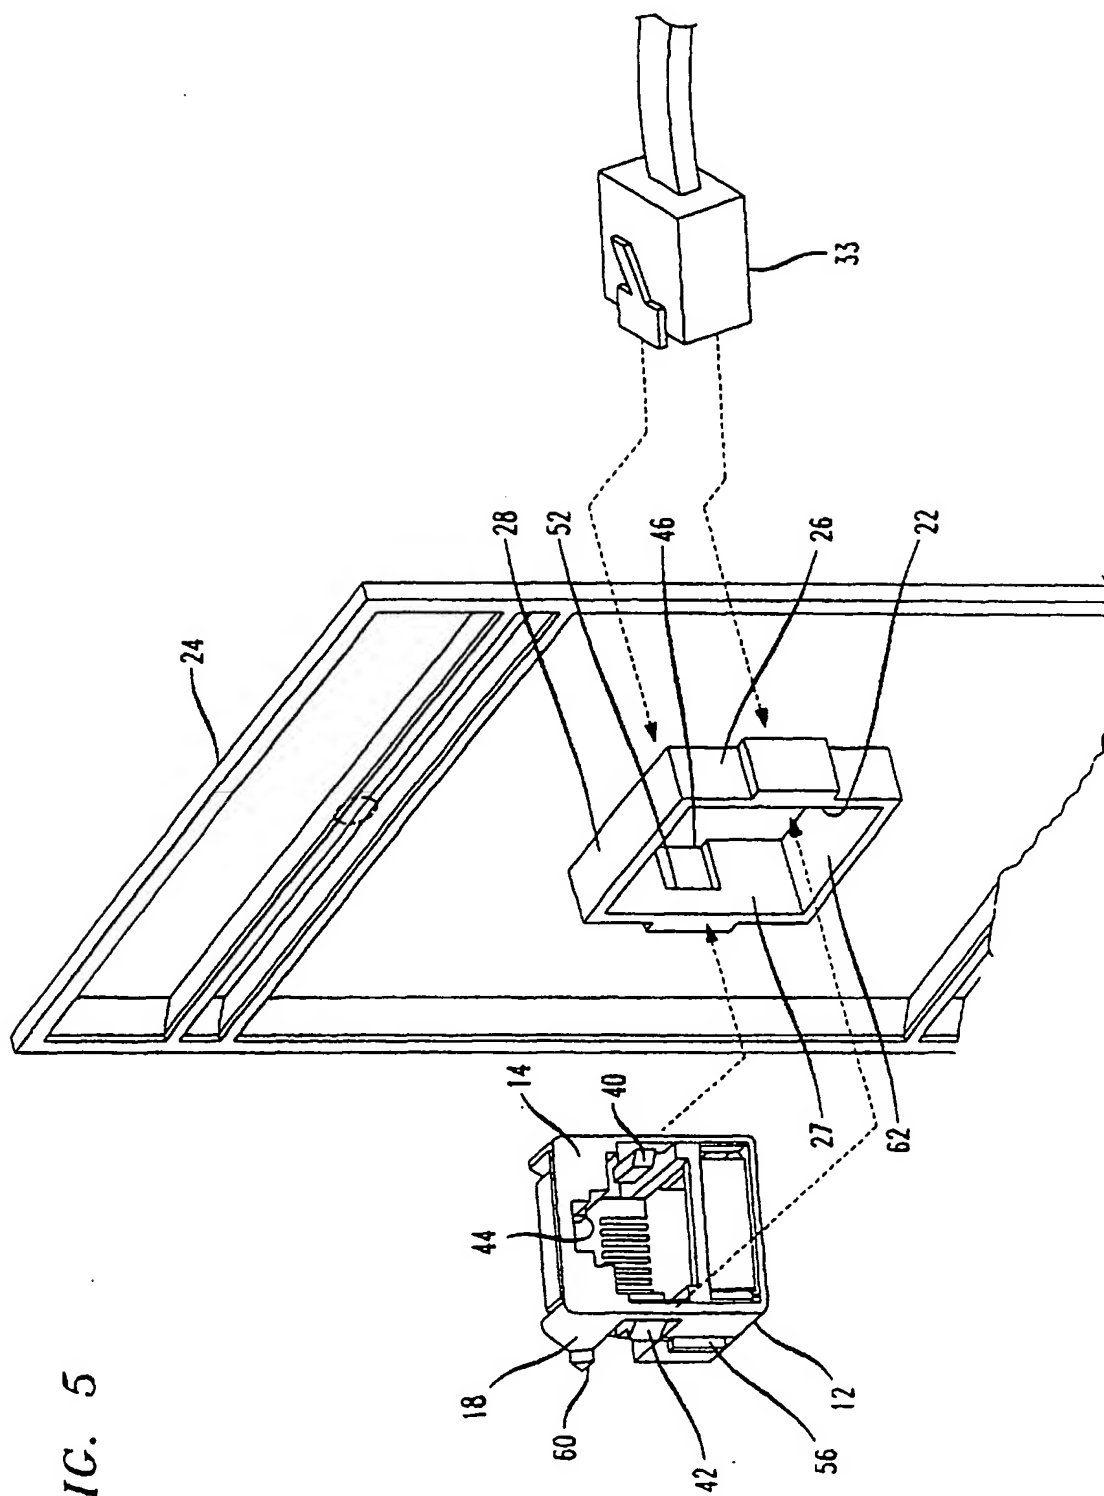


FIG. 5

FIG. 6

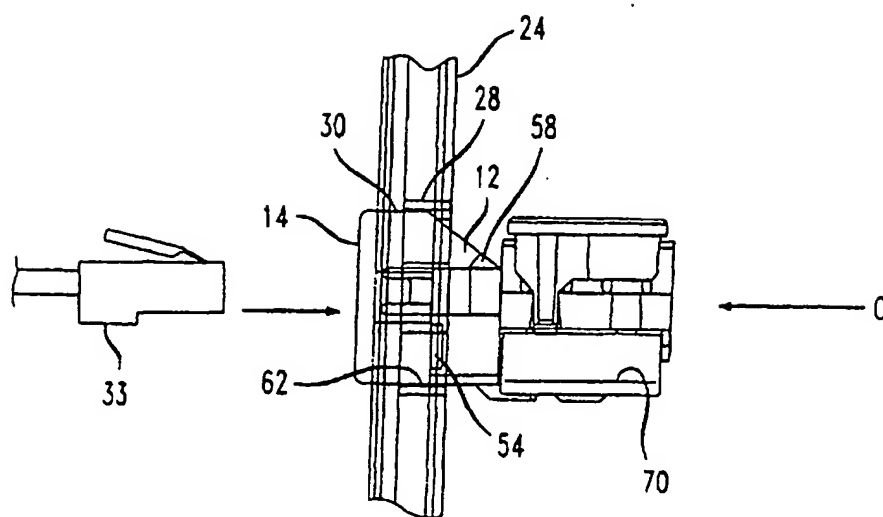


FIG. 7

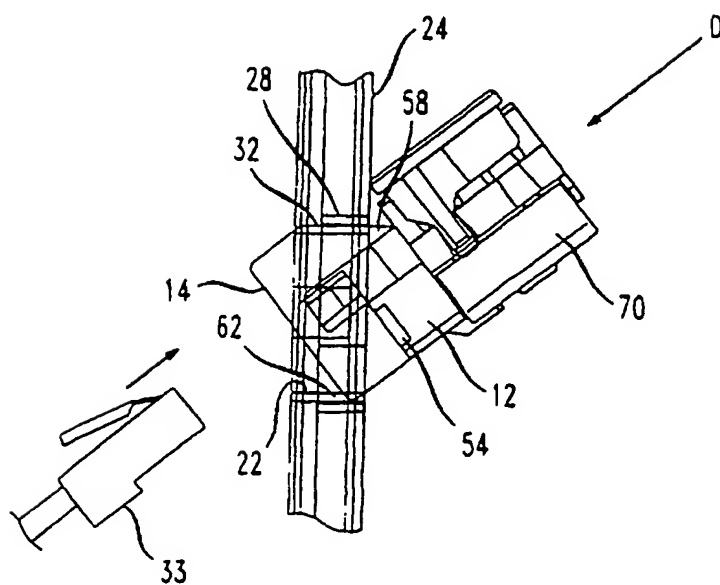


FIG. 8

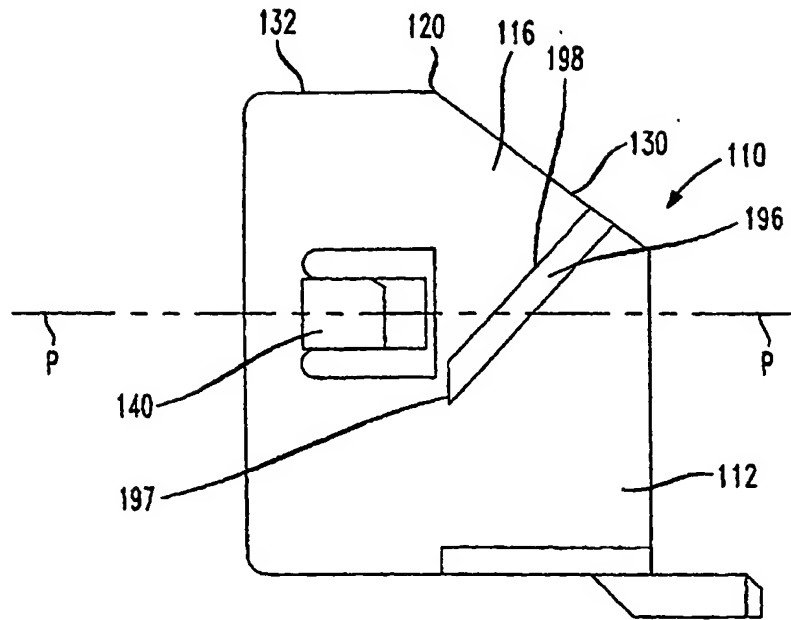


FIG. 9

